

Apollo™

PVC-O PRESSURE SYSTEMS

Introducing ecoFIT TOM® the world's first PVC-O pressure fittings for use in Rural and Civil pressurised water reticulation networks

Strong - molecular orientation offers outstanding mechanical properties; impact strength, crack propagation and fatigue resistance

Easy to install

- fitted retained rubber ring joint seal system
- significantly lighter than the Ductile Iron equivalent fittings

Asset security

- 16-bar pressure rated (**PN16**)
- Corrosion resistant material
- Single material pipe system - compatible with **Series 1** PVC-O, PVC-M and PVC-U pressure pipe

Cost effective - compared to fabricated PVC or metallic fittings

Quality assurance - applied for compliance to prEN 17176 Part 3 Piping Systems For Water Supply And For Buried And Above Ground Drainage, Sewerage And Irrigation Under Pressure - Oriented Unplasticized Poly(Vinyl Chloride) (PVC-O)

**Ranging Diameters
(Series 1 OD sizes)**


- DN 150
- DN 175
- DN 225
- DN 300
- DN 375

Fittings

Bends 22.5° & 45°

Coupling & Slip/ Repair Coupling

Reducing Socket

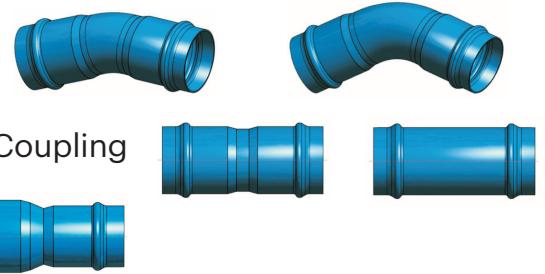

Iplex Pipelines NZ Limited
Call 0800 800 262 or Fax 0800 800 804

Auckland: Private Bag 92 114, 810 Great South Road, Penrose
Palmerston North: Private Bag 11019, 67 Malden Street
Christchurch: PO Box 16225, 22 Braeburn Drive, Sockburn

www.iplex.co.nz

iplex
Pipelines